



J1939 Protocol Stack

SAE J1939 Support for esd CAN Boards and SoC with CAN support

Features:

- All SAE J1939 communication mechanisms supported (except bridge function)
- Full support for the transport protocols ('TP-BAM'/'TP-CM') to transmit larger blocks of data
- Quick software development due to convenient functions: e.g. sending PGN data automatically, callback functions for incoming requests
- Automatic handling of address claiming procedures by callback functions: all 4 address configuration types are possible
- Pre-filtering of messages according to PGN and source address
- Parallel communication with several ECUs
- Support of cyclic transmission of PGN data

- Support for multiple physical CAN ports
- Support for multiple logical devices on the same physical CAN port
- Source code license available
 - Easy adaptation to other target systems due to modular structure of the J1939 protocol with well defined abstraction layers
 - Written in ANSI-C
 - For big/little endian systems, CPU independent
 - Many settings can be adapted to the requirements of the application and the available hardware resources by simple configuration files at compile time.

Requirements:

Object License:

- Hardware: esd CAN module supporting 29-bit CAN-ID (NTCAN-API compatible), e.g.
 - CAN-USB/2
 - CAN-PCIe/200
 - CAN-PCI/405
 - CPCI-405
- Operating System:
 - Windows, Linux, other operating systems like QNX or Vx-Works on request.

Source Code License:

- Hardware: Embedded CPU with CAN controller and timer
- CAN implementation: own, or as additional service by esd for 16 bit and 32 bit controllers (e.g. NXP LPC2292 or Fujitsu MB90543)

J1939 Starter Kit:

- USB CAN-Controller (esd CAN USB/2) with driver license
- J1939 Stack object license (library) with examples
- CANreal monitor and simulation tool w/ J1939 plug-in
- J1939 DSM (Device Simulation and Monitor) program
- Example source code

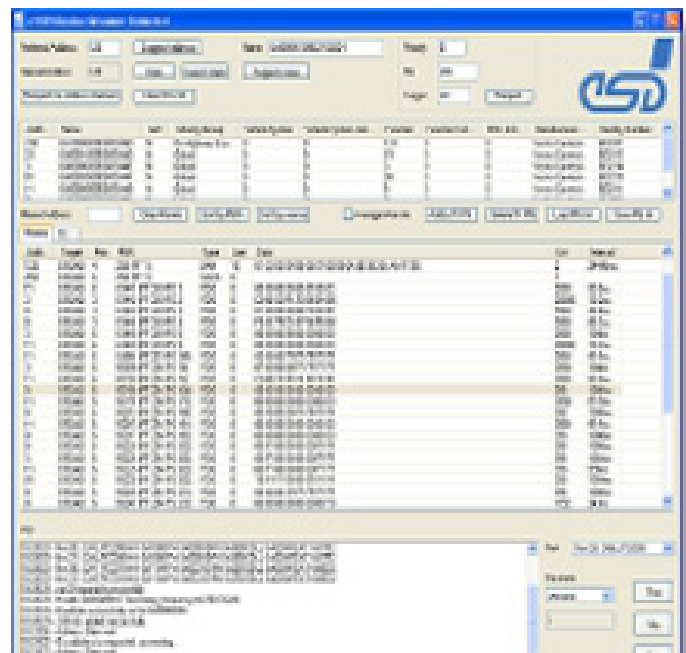


Figure: Screenshot of J1939 DSM (Device Simulation and Monitor) program.

For further information please visit
<http://www.esd-electronics-usa.com/SAE-J1939-Software.html>

growing with the
challenge

J1939 Protocol Stack

SAE J1939 Support for esd CAN Boards and SoC with CAN support

Tools:

CANreal Monitor and Simulation Tool (for Windows and esd CAN hardware only)

- Display and recording of CAN message frames with high-resolution time stamps
- Protocol interpreter e.g. for J1939
- Supports message ID filtering
- Multiple instances of the software on the same or on different channels can run at the same time
- Supports transmission of user defined CAN message frames

J1939 DSM (Device Simulation and Monitor) Program

- Simulates a J1939 ECU
- Multiple instances of the software on the same or on different channels can run at the same time
- Monitors complete PGN traffic on the bus
- Tx messages can be set up for cyclic transmission or for transmission on request only
- Manual transmission of PGN possible
- Manual sending of requests
- Log shows all user interaction and anomalies in the J1939 protocol parsing
- Supported operating system: Windows, Linux (as GTK+ application)

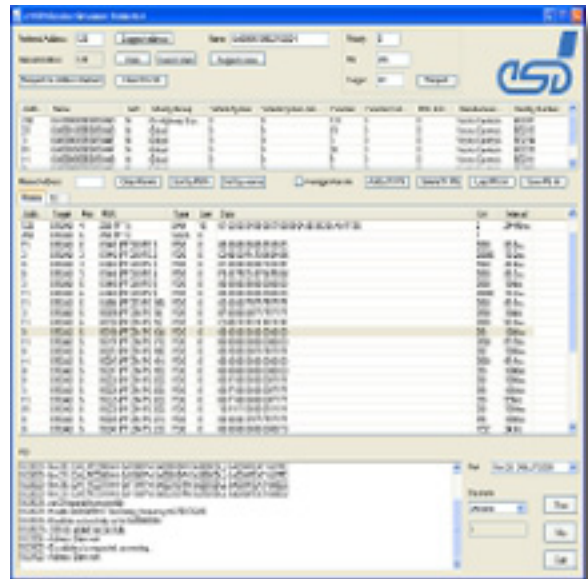


Figure: Screenshot of J1939 DSM (Device Simulation and Monitor) program.

Order Information:

Designation		Order no.
J1939 Stack for Windows (object code, runtime license)	J1939 Stack for Windows for esd CAN hardware as Win32 library, incl. CANreal, J1939 plug in, J1939 DSM, esd CAN Windows driver license, example source code	C.1130.10
J1939 Stack for Linux (object code, runtime license)	J1939 Stack for Linux for esd CAN hardware as shared library (32/64 bit), incl. J1939 DSM (32/64 bit), esd CAN Linux driver license, example source code	C.1130.11
J1939 Stack (source code, project license)	J1939 Stack for microcontrollers (SoC with CAN support)	C.1130.15
J1939 Starter Kit	CAN-USB/2 interface module, complete wiring for two CAN nodes, incl. J1939 Stack for Windows (order No. C.1130.10)	C.1130.09

