




# VME-PMC-CPU/2

## VME PowerPC Processor Board with 2 PMC Slots

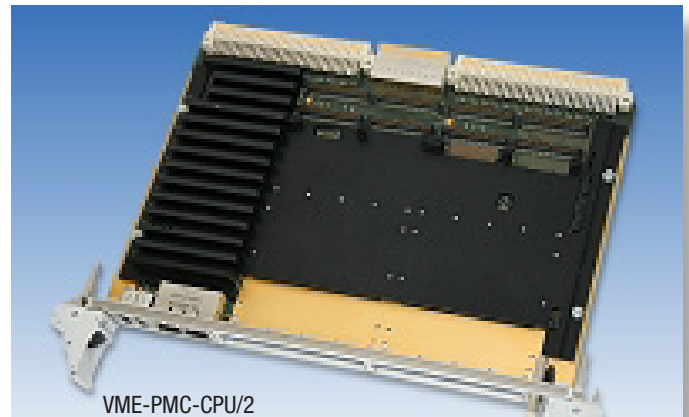

### VMEbus Interface

- Master or slave functionality
- 4-level arbiter
- Address/data up to A64/D64
- VME64-extension connector
- 2eVME and 2eSST fast protocol

### PowerPC CPU

- Freescale MPC 8349
- 533 MHz (optional up to 667 MHz for standard temperature range board)
- 512 Mbyte DDR2 RAM ECC (optional up to 1 Gbyte)
- 128 Mbyte Flash (NOR)
- 2 Gbyte NAND Flash
- XC3S1600E FPGA (shared with NAND Flash interface)
- 2x Gbit Ethernet
- 2x USB 2.0 Hi-Speed
- 2x RS-232 serial interface

### VME-PCI Link

The VMEbus unit VME-PMC-CPU/2 is a VME64-base board that can carry up to two PMC modules of normal size. For the VME-bus connection, the VME-PCI bridge Tsi148 by Tundra is used.

### VMEbus Interface

The Tsi148 allows the board to operate either as slave or as master on the VMEbus. If the board operates as master, it supports a 4-level arbiter. Any of the seven-interrupt request lines accepts application of the VMEbus interrupt, and the board connects to the VMEbus by two 160-pin VG-connectors (complementary to DIN41612) for VME64 systems. LEDs in the front panel indicate an active VMEbus-interrupt request and a VMEbus access onto the board.

### PMC Slots

- Slots according to IEEE Std 1386-2001 specified
- Two single size PMC modules insertable
- VME-PCI bridge Tundra Tsi148
- PMC I/Os applied to VMEbus P2, signals routed acc. to VITA 35 (P4V2-64ac, P4V0-64)
- Option '-32P2': different P2-pinning
- PPMC according to VITA 32
- One XMC according to VITA 42.3
- PCI 64 bit at 66 MHz, 3.3 V only

### Options

- Versions for extended temperature range available

### Power PC CPU

A high efficient PowerPC MPC8349 powers the board at 533 or 667 MHz with the advantage of frugal power consumption. The fast floating-point unit of type 603 allows complex algorithms at formidable speed. The memory enables ECC with a capacity of 512 Mbyte or optional 1 Gbyte DDR2-typed RAM. The flash memory of 2 Gbyte allows even complex and ambitious operating systems as well as user's application. The on-board FPGA controls the set-up of the board resources, including the complex Tsi148 VME interface and the PMC slots, but is mighty enough to enable a programming API for the programmers usage. The board also includes 2 Gbit Ethernet ports, 2 USB 2.0 Hi-Speed ports and 2 RS-232 serial ports with access through the front panel. Various LEDs signal state of operation - also usable at programmers demand.

For further information please visit  
<http://www.esd-electronics-usa.com/VME.html>

growing with the  
challenge

# VME-PMC-CPU/2

## VME PowerPC Processor Board with 2 PMC Slots

### PMC Slots

Designed according to the IEEE STD 1386-2001 standard (except the standard I/O pin routing), both PMC slots allow insertion of all PMC modules, that use 3.3 V signaling only.

In addition to the connectors for the PMC address/ data and control signals, every slot of the VME-PMC-CPU/2 has an I/O connector that applies the I/O-signals of the PMC modules to VMEbus connector P2. Two different P2 pin assignments are available: In the standard configuration, each P2-pin connects to one I/O pin of the PMC-modules acc. to VITA 35 (P4V2-64ac, P4V0-64). In the option '-32P', the pin assignment is acc. to IEEE Std 1386-2001, Table 8. This pin assignment offers the connection of the two PMC-modules via P2, because several PMC-I/O-signals are shorted at P2.

### Front Panel

The front panel of the VME-PMC-CPU/2 has two cutouts for the front panels of the PMC modules. A blank cover for unused slots is included in the price. Software BSPs are available for VxWorks, Linux and QNX.

### Technical Specifications:

VMEbus	
Controller:	TUNDRA Tsi148
VMEbus access:	Legacy protocols to protect existing VME investment VME64 extensions 2eVME and 2eSST protocols
Base address:	Geographical addressing
Address modifier:	Standard supervisory and non-privileged data access Extended supervisory and non-privileged data access Short supervisory and non-privileged access
VMEbus standard:	IEEE 1014 Rev. D
VMEbus connector:	160-pole VG connector (complementary to DIN 41612), acc. to VME64 extension standard
LEDs:	LEDs in the front panel indicate VMEbus interrupt and VMEbus access

PMC/XMC slots:	
Standard:	IEEE Std 1386-2001
Size:	Two single size modules
VME PCI Bridge:	Tundra Tsi148, 32/64 bit at 33/66 MHz
PCI Voltage level:	3.3 V (signal level) only
XMC:	Slot 1 with 4 lane XMC interface (J15) according to VITA 42.3 standard
General:	
Temperature:	Standard: 0...50 /C (Order no.: V.1917.01/.11) Extended: -40...+85 /C (Order no. V.1917.02 /.13)
Humidity:	Max. 90 %, non-condensing
Connector types:	P1, P2: VMEbus (160 pins) P0: VMEbus (114 pins) J11, J12, J21, J22: PMC address/data J13, J23: PCI 64 signals J14, J24: PMC I/O signals J15: XMC
Board size:	160 mm x 233 mm
VME dimensions:	6 U height, 4 HP width

### Order Information:

Designation		Order no.
VME-PMC-CPU/2	VMEbus base board for two single PMC modules, P2-pin assignment acc. to VITA 35 (P4V2-64ac, P4V0-64), (no interconnection between PMC modules)	V.1917.01
VME-PMC-CPU/2-T	As V.1917.01, but for extended temperature range: -40...+85 /C	V.1917.02
VME-PMC-CPU/2- 32P	VMEbus base board for two 32P2 single PMC modules, P2-pin assignment acc. to IEEE Std 1386-2001, Table 8 (interconnection between 16 pins of the PMC-modules)	V.1917.11
VME-PMC-CPU/2- T-32P	As V.1917.11, but for extended temperature range: -40...+85 /C	V.1917.13
VME-PMC-CPU/2- Linux	Linux BSP	V.1917.57
VME-PMC-CPU/2- VxWorks	VxWorks BSP	V.1917.58
VME-PMC-CPU/2- QNX	QNX BSP	V.1917.59

